


115-L3 LEAD LINED METAL VISION KIT

Center Lead Series Non-Labeled Door



268 OLD LINDALE RD. ▲ ROME, GA 30161
706-235-8822 ▲ FAX 706-232-2518

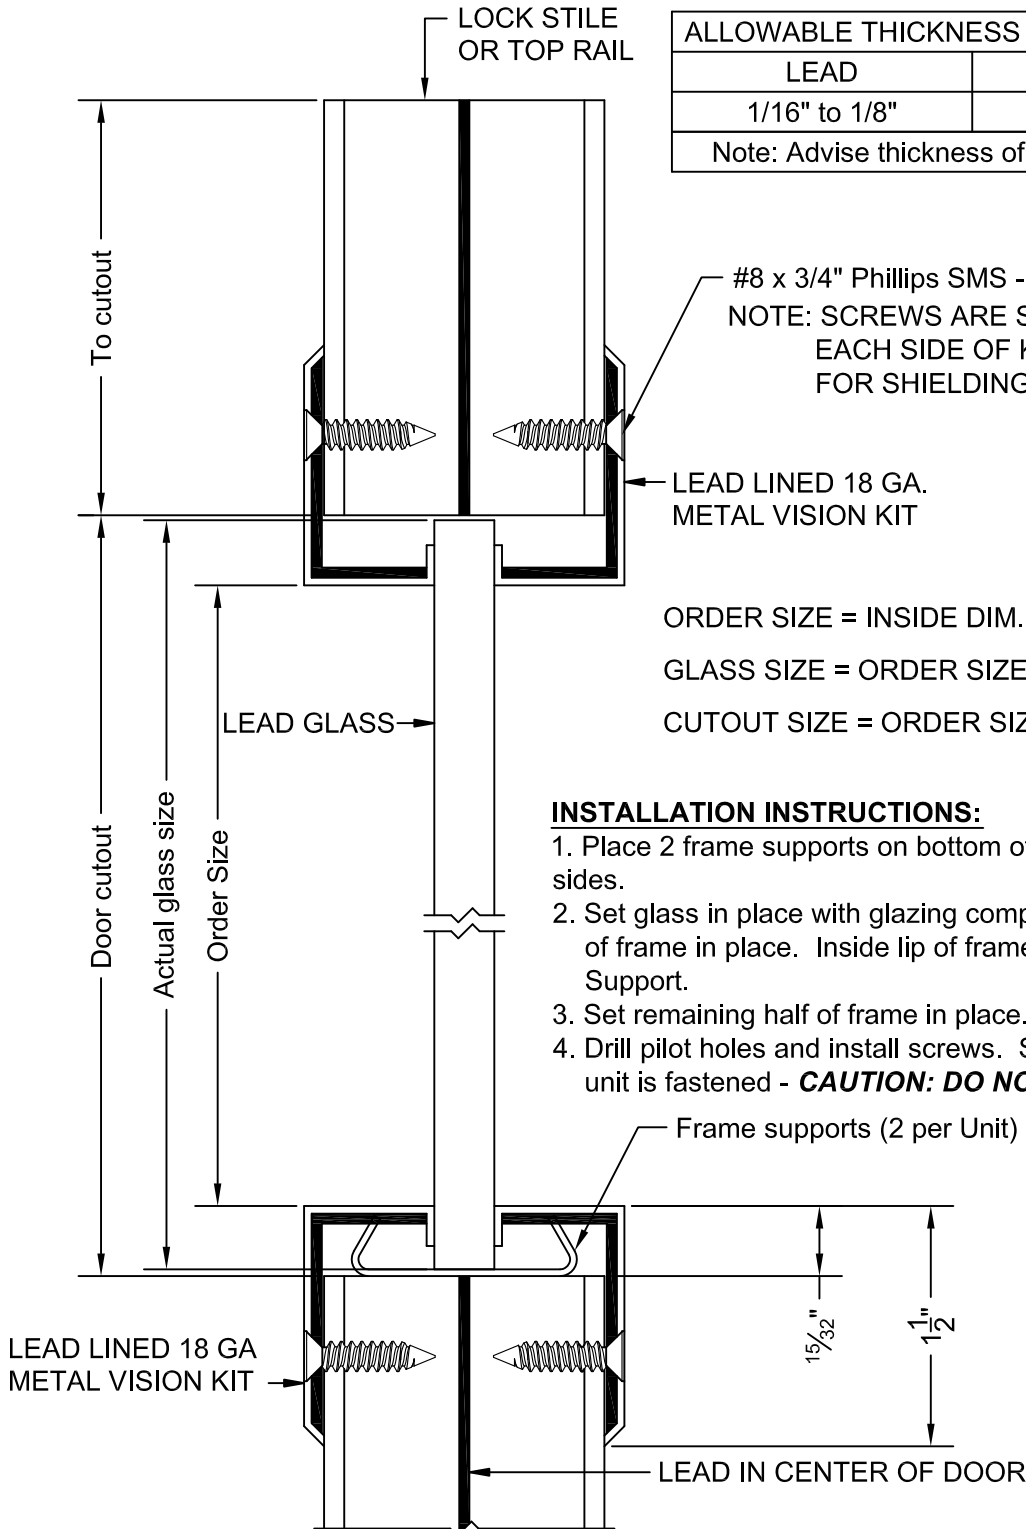

ALLOWABLE THICKNESS FOR 1 3/4" DOOR	
LEAD	LEAD GLASS
1/16" to 1/8"	1/4" to 3/4"
Note: Advise thickness of each with order.	

#8 x 3/4" Phillips SMS - Provided
NOTE: SCREWS ARE STAGGERED EACH SIDE OF KIT FOR SHIELDING.

ORDER SIZE = INSIDE DIM. OF FRAME
GLASS SIZE = ORDER SIZE + 3/4"
CUTOUT SIZE = ORDER SIZE + 15/16"

INSTALLATION INSTRUCTIONS:

1. Place 2 frame supports on bottom of cutout equally spaced from sides.
2. Set glass in place with glazing compound or tape. Then set one side of frame in place. Inside lip of frame must be over tab on Frame Support.
3. Set remaining half of frame in place.
4. Drill pilot holes and install screws. Snug all screws evenly after entire unit is fastened - **CAUTION: DO NOT over tighten screws!**