


# CORECLAD<sup>®</sup> Series Door Lead Lined Wood Door



268 OLD LINDALE RD. ▲ ROME, GA 30161  
706-235-8822 ▲ FAX 706-232-2518

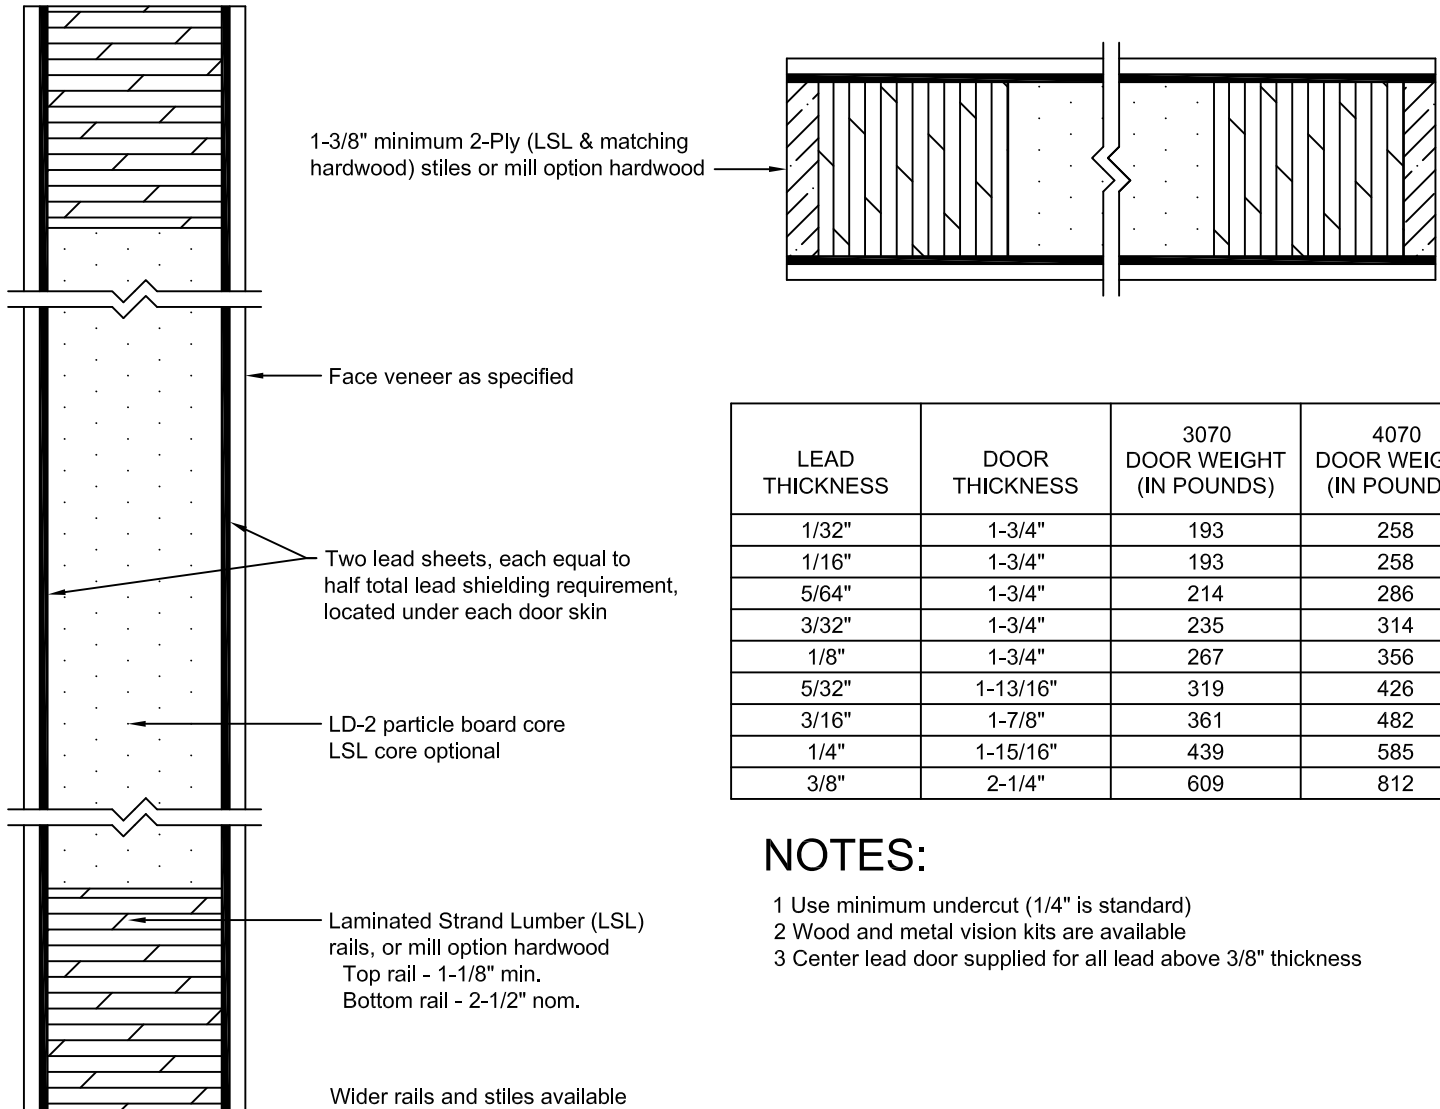

LEAD THICKNESS	DOOR THICKNESS	3070 DOOR WEIGHT (IN POUNDS)	4070 DOOR WEIGHT (IN POUNDS)
1/32"	1-3/4"	193	258
1/16"	1-3/4"	193	258
5/64"	1-3/4"	214	286
3/32"	1-3/4"	235	314
1/8"	1-3/4"	267	356
5/32"	1-13/16"	319	426
3/16"	1-7/8"	361	482
1/4"	1-15/16"	439	585
3/8"	2-1/4"	609	812

## NOTES:

- 1 Use minimum undercut (1/4" is standard)
- 2 Wood and metal vision kits are available
- 3 Center lead door supplied for all lead above 3/8" thickness

Door types available:

1. Non-Rated
2. 20-minute Neutral pressure
3. 20-minute positive pressure Cat. "A" with concealed intumescent
4. 20-minute positive pressure Cat. "B" with frame mount intumescent

NOTE: Frame mounted listed and approved, smoke gasket required for positive pressure doors for "S" (smoke) label