


Center Lead Lined Wood Door



268 OLD LINDALE RD. ▲ ROME, GA 30161
706-235-8822 ▲ FAX 706-232-2518

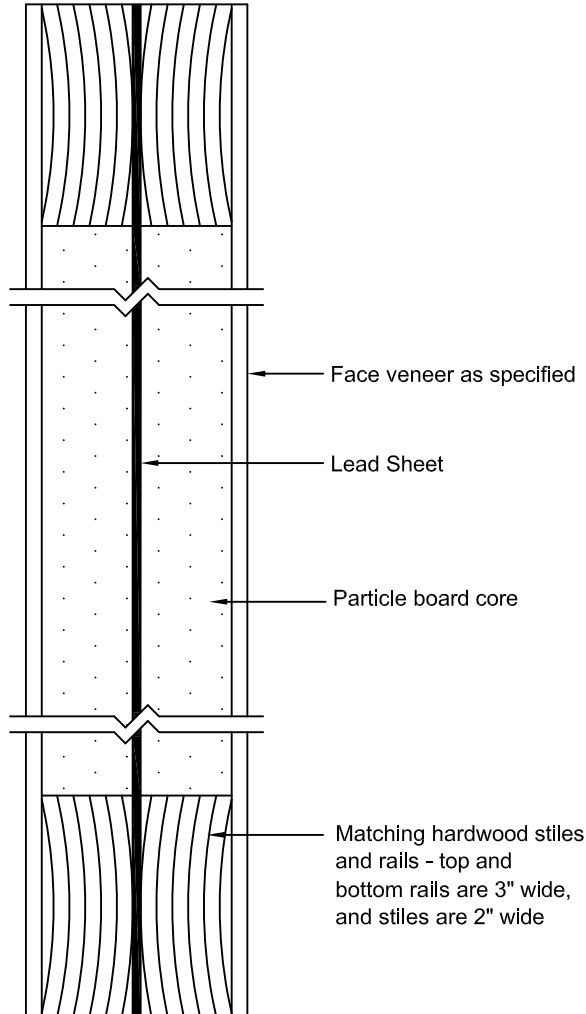

LEAD THICKNESS	DOOR THICKNESS	3070 DOOR WEIGHT (IN POUNDS)	4070 DOOR WEIGHT (IN POUNDS)
1/32"	1-3/4"	210	280
3/64"	1-3/4"	231	308
1/16"	1-3/4"	252	336
5/64"	1-3/4"	273	364
3/32"	1-3/4"	294	392
1/8"	1-13/16"	326	434
5/32"	1-7/8"	378	504
3/16"	1-15/16"	420	560
1/4"	2-1/4"	483	644
3/8"	2-3/8"	672	896
1/2"	2-1/2"	798	1064

NOTES:

- 1 Use minimum undercut (1/4" is standard)
- 2 Wood and metal vision kits are available
- 3 The core and lead is firmly fastened together with adhesive. The veneer is applied under pressure. Labeled doors and doors with lead thicknesses greater than 3/16" have their cores fastened at the edges with steel bolts, nuts and washers. The remainder of the door core is fastened with poured lead dowels, located on eight inch centers throughout the core. All bolt heads, nuts and washers are covered with poured lead to ensure shielding continuity. The core is smoothed to a uniform surface prior to veneer application.

Door types available:

1. Non-Rated
2. 20-minute Neutral pressure
3. 20-minute positive pressure Cat. "A" with concealed intumescent
4. 20-minute positive pressure Cat. "B" with frame mount intumescent

NOTE: Frame mounted listed and approved, smoke gasket required for positive pressure doors for "S" (smoke) label